



AKK – Keychain Pen Kits – Fitting & assembly Guide


To complete the Premium Keyring Pen Kit you will require the following:

Suitable blank 47mm long + extra for trimming

8mm drill bit

Bushing set (AKK BSH)

Glue & finishing products

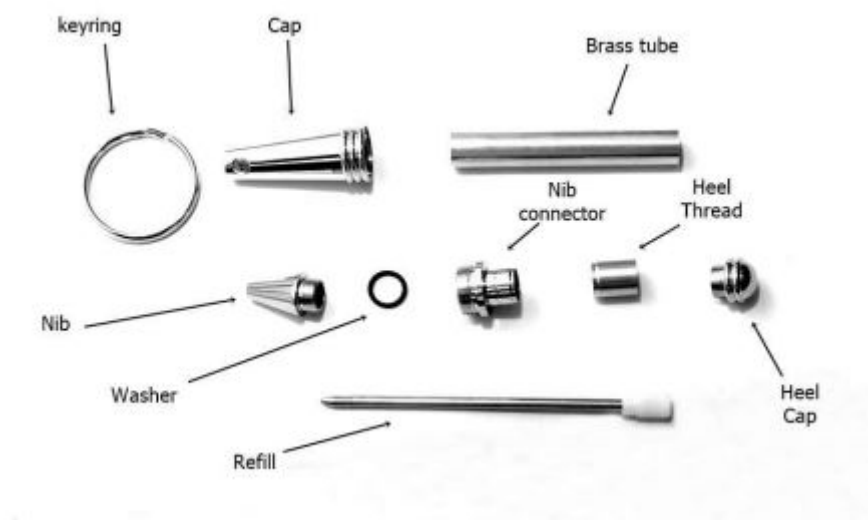

1] Using a medium grit abrasive paper roughen the surface of the brass pen tube and glue into your chosen blank, trim to the length of the brass tube.

2] The blank can be mounted between centres (dead centre at headstock live centre at tailstock) or on a standard pen mandrel between the 2 bushings, the large bushing is for the cap end, the small one for the heel.

3] Turn and finish / polish the pen blank as required

ASSEMBLY:

4] Press the nib connector into the wider part of the finished blank until a good fit is achieved

5] Press the brass heel thread into the narrow end of the body – there is a rebate to help with locating it to make sure it is the correct way round

6] Screw on the nib section and then fit the small black washer into the rebate on the nib connector

7] Insert the refill and screw into place (a screwdriver can be used), screw the heel cap on – make sure this is as tight as you can get it so it does not come loose.

8] Attach the keyring to the cap and then screw the assembly over the nib, the kit is now finished and ready to attach to your keys

We recommend the heel cap is screwed on as tightly as possible and retightened regularly to ensure it remains secure every 2-3 weeks